

VPB-260 BATTERY BACK-UP SUPPLY

INTRODUCTION

These instructions contain the specifications and information necessary to install, operate, and maintain the VPB-260, Battery Back-up Power Supply.

SPECIFICATIONS

The VPB-260 provides a battery source to permit system operation in the event of an AC power failure.

Features

- 12 and 24 volt DC outputs
- Outputs fused at 3 amps
- AC input fuse protected
- Power on LED indication
- Full current limiting on battery charger
- Long life Gel Cell Batteries
- Battery test switch with light indication

Capacity

Table 1 shows the approximate times for a fully charged supply to reach 90% voltage under different load conditions.

NOTE: All electronic key systems will begin to operate intermittently below a certain input voltage. Typically reliable operation will be maintained to 90% of full voltage.

<i>Table 1</i>	
<i>Discharge Current vs. Time</i>	
<i>Current</i>	<i>Time</i>
2.5 Amps	1 hr. 40 min.
1 Amp	4 hours
.5 Amp	10 hours
.325 Amp	20 hours



Applications

The VPB-260 is known to be compatible with the following systems:

Telephone Systems:

- | | |
|------------------------|--|
| CMX | CKS-308
CKS-616
CKS-408/816/1224 |
| Gaitronics | Cohort 616 (see Application Note) |
| Sanyo | EKS 6120 (reverse 12V & 24V leads) |
| Tie | EK-612
Modkey 16 (WA-260T may be required)
Modkey 1032
DS-01
Onyx VS |
| Executone | Encore CX 512
Encore CX 816 |
| Premier Telecom | 1A2 |
| Siemens Telplus | Telplus 816
Telplus 1224 |
| Trillium | Panther 612 (WA-260P required)
Panther 1032 (WA-260P required)
Panther II (820) (WA-260P required) |
| Vodavi | Starplus 308EX
Starplus 616EX
Starplus 1224EX |

Valcom Page Controls

V-2001, V-2001A, V-2003, V-2003A, V-2003HF, V-2003AHF, V-2006, V-2006A, V-2006HF, V-2006AHF, V-2901, V-2901A, V-2904, V-2920, V-2924

Dimensions/Weight

- 9.25" H x 7.5" W x 5.25" D
(23.5cm H x 19.05cm W x 13.3cm D)
- 19 lbs (8.6 kg)

Specifications

- Output 24 Vdc and 12 Vdc fused at 3 amps each
- Current limited, constant voltage charger
- Gel Cell no maintenance type batteries
- Typical battery life is 3-5 years

Power Requirements

- Input 105-120 Vac, 60 Hz


Environment

- Temperature 0 to 50 Degrees C
- Humidity 0 to 85% non-precipitating

DESIGN

The VPB-260 is a fully filtered battery back-up power supply. The input and both outputs are fuse protected. The charger circuit output is floating with respect to ground. The charging circuit provides a constant voltage and is current limited to 1.5 amps to the two Gel Cells. There is a "power on" LED that is illuminated when the supply is connected to the AC power source. There is also a test button for testing the batteries. When pressing this button, the LED will illuminate if the batteries are fully charged.

Figure 1: Low Voltage Plug Outputs

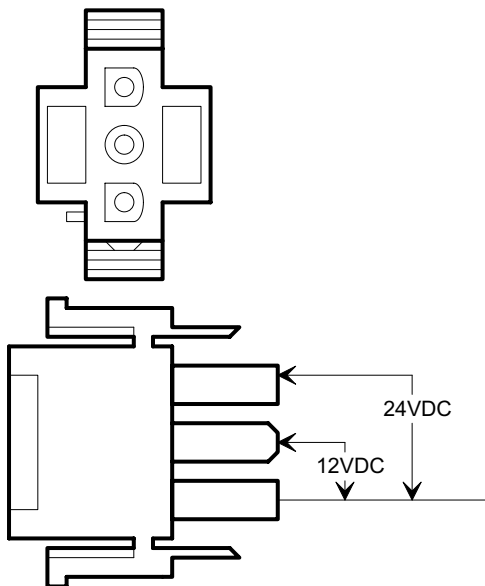

INSTALLATION

Mounting

Using the appropriate hardware, mount the VPB-260 within 6 feet of an AC receptacle.

Connections

Unplug the KSU power cord. Consult the installation manual of the key system for the location of the input socket for the battery backup supply. Plug the low voltage power cord of the auxiliary power system into the socket.

NOTE: The plug is polarized and will only fit one way. After making sure that the plug is seated in the socket, plug in the AC power cords. **Both the AC power cord for the VPB-260 and the power cord for the KSU should use the same AC outlet.** Figure 1 shows low voltage plug outputs.

NOTE: Time to reach a full charge after initial installation or after a deep discharge is approximately 9 hours.

MAINTENANCE

In order to insure proper operation of the battery supply, the following operation should be performed once a month.

Unplug the key system from the AC power receptacle to allow operation from the batteries for 15 minutes. Plug key system power cord into AC outlet.

TECHNICAL ASSISTANCE

When trouble is reported, verify that AC power is being supplied to the unit and there are no blown fuses. To test the batteries for full charge, unplug the VPB-260 and press the button marked test on the side of the unit. The LED lights when batteries are okay. Assistance in troubleshooting is available from the factory. When calling, you should have a VOM and a test set available and be calling from the job site. Call (703) 427-3900 and ask for Technical Support, or (540) 427-6000 for Valcom 24-hour Automated Support or visit our website at <http://www.valcom.com>.

Valcom equipment is not field repairable. Valcom, Inc. maintains service facilities in Roanoke, VA. Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

Valcom, Inc.
Repair and Return Dept.
5614 Hollins Road
Roanoke, VA 24019-5056

VALCOM LIMITED WARRANTY

Valcom, Inc. warrants its products to be free from defects in materials and workmanship under conditions of normal use and service for a period of one year from the date of shipment. The obligation under this warranty shall be limited to the replacement, repair or refund of any such defective device within the warranty period, provided that:

1. inspection by Valcom, Inc. indicates the validity of the claim,
2. the defect is not the result of damage, misuse, or negligence after the original shipment.
3. the product has not been altered in any way or repaired by others and that factory sealed units are unopened (A service charge plus parts and labor will be applied to units defaced or physically damaged),
4. freight charges for the return of products to Valcom are prepaid,
5. all units 'out of warranty' are subject to a service charge. The service charge will cover minor repairs (Major repairs will be subject to additional charges for parts and labor).

This warranty is in lieu of and excludes all other warranties, expressed or implied, and in no event shall Valcom, Inc. be liable for any anticipated profits, consequential damages, loss of time or other losses incurred by the buyer in connection with the purchase, operation, or use of the product.

This warranty specifically excludes damage incurred in shipment. In the event a product is received in damaged condition, the carrier should be notified immediately. Claims for such damage should be filed with the carrier involved in accordance with the F.O.B. point.

Headquarters:
Valcom, Inc.
1111 Industry Avenue
Roanoke, VA 24013
Phone: (540) 427-3900
FAX: (540) 427-3517

In Canada
CMX Corporation
35 Van Kirk Drive #11 and 12
Brampton, Ontario L7A1A5
Phone: (905) 456-1072
FAX: (905) 456-2269