

## V-2972 CALL SWITCH

### INTRODUCTION

The V-2972 Call Switch was designed to be used with Talkback Page Control Units with the remote calling feature. The V-2972 provides a momentary spring return rocker switch for connection to customer provided signaling equipment.

### DIMENSIONS/WEIGHT

- 4.50" H x 2.75" W x 1.50" D  
(11.43cm H x 6.99cm W x 3.81cm D)
- 0.2 lbs. (.09 kg)

### FEATURES

- Designed to fit in a standard single-gang electrical box.
- No external power source required.
- White "Call" button for normal call.
- Satin finished one-gang stainless steel plate.

### CONNECTIONS/SETUP

1. Connect switch inputs from control unit to V-2972 as shown in connection diagram.
2. Connections are made by factory supplied 3 inch insulated pigtailed that connect to push-on style terminals.
3. Place V-2972 over standard single-gang electrical box with minimum depth of 2 inches and fasten in place using the two #6-32 screws provided.



### TECHNICAL ASSISTANCE


When trouble is reported, verify that there are no shorts or grounds on cabling.

Assistance in troubleshooting is available from the factory. When calling, you should have a VOM, a telephone test set available and call from the job site. Call (540) 563-2000 and press 1 for Technical Support or visit our website at <http://www.valcom.com>.

Valcom equipment is not field repairable. Valcom, Inc. maintains service facilities in Roanoke, VA. Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person and the nature of the problem. Send the unit to:

**Valcom, Inc.  
Repair and Return Dept.  
5614 Hollins Road  
Roanoke, VA 24019-5056**

### V-2972 Connections (Rear View)

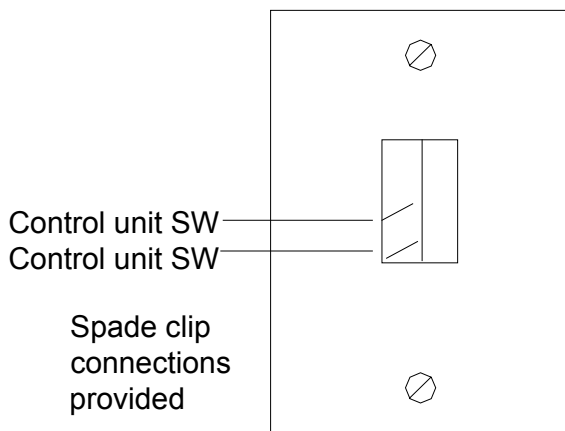

#### VALCOM LIMITED WARRANTY

Valcom, Inc. warrants its products to be free from defects in materials and workmanship under conditions of normal use and service for a period of one year from the date of shipment. The obligation under this warranty shall be limited to the replacement, repair or refund of any such defective device within the warranty period, provided that:

1. inspection by Valcom, Inc. indicates the validity of the claim;
2. the defect is not the result of damage, misuse, or negligence after the original shipment;
3. the product has not been altered in any way or repaired by others and that factory sealed units are unopened (a service charge plus parts and labor will be applied to units defaced or physically damaged);
4. freight charges for the return of products to Valcom are prepaid;
5. all units 'out of warranty' are subject to a service charge. The service charge will cover minor repairs (major repairs will be subject to additional charges for parts and labor).

**This warranty is in lieu of and excludes all other warranties, expressed or implied and in no event shall Valcom, Inc. be liable for any anticipated profits, consequential damages, loss of time or other losses incurred by the buyer in connection with the purchase, operation or use of the product.**

This warranty specifically excludes damage incurred in shipment. In the event a product is received in damaged condition, the carrier should be notified immediately. Claims for such damage should be filed with the carrier involved in accordance with the F.O.B. point.

Headquarters:  
Valcom, Inc.  
5614 Hollins Road  
Roanoke, VA 24019-5056  
Phone: (540)563-2000  
FAX: (540) 767-1555

In Canada  
CMX Corporation  
35 Van Kirk Drive #11 and 12  
Brampton, Ontario L7A 1A5  
Phone: (905) 456-1072  
FAX: (905) 456-2269